


SSUEFB..A All stainless steel flange bracket units and inch-based housing, Concentric locking

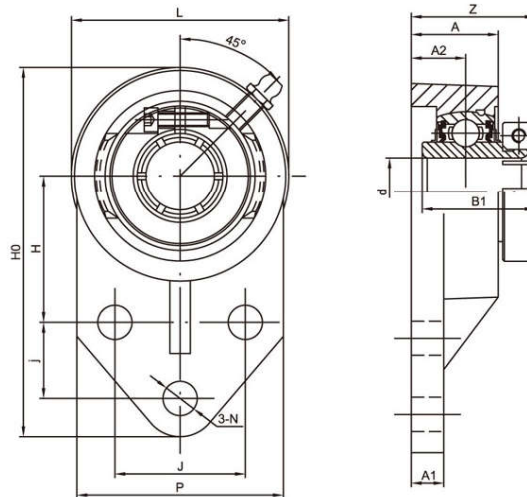

Unit No.	Shaft Dia		Dimensions(mm)													Bolt Size (mm)	Weight (kg)
	d		H ₀	H	J	j	A ₂	A ₁	A	N	L	P	B ₁	S	Z		
	(in)	(mm)															
SSUEFB204A 204-12A	3/4	20	108	42.9	38.1	22.2	15.9	9.5	25.4	10	63.5	60.3	33	12.7	36.2	M8	0.60
SSUEFB205A 205-14A 205-15A 205-16A	7/8 15/16 1	25	120.7	46	41.6	28.6	16.7	11.1	29.4	10	69.1	63.5	35.4	14.3	37.7	M8	0.80
SSUEFB206A 206-17A 206-18A 206-19A 206-20A	1-1/16 1-1/8 1-3/16 1-1/4	30	136.5	52.4	47.6	31.8	18.7	11.1	33.3	10	82.6	70	39.8	15.9	42.5	M8	1.13
SSUEFB207A 207-20A 207-21A 207-22A 207-23A	1-1/4 1-5/16 1-3/8 1-7/16	35	155.6	60.3	50.8	31.8	21	14.3	37.3	13	94.5	82.6	43.9	17.5	47.4	M10	1.70

Notes: 1. Upon request, available with plastic close cap(CC) or open cap(OC) at one end. Ordering example SSUEFB204-12A CC.
2. Lubricated with food grade grease.