


LDK[®] Flange Cartridge Units

UCFCSX Medium duty,Wider inner ring bearing,Inch-based housing,Setscrew locking

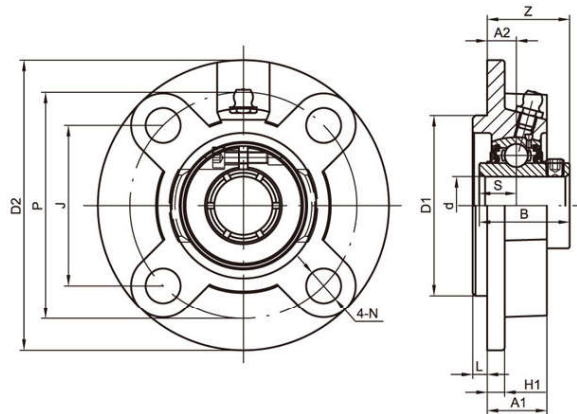

Unit No.	Shaft Dia		Dimensions (mm)												Weight (kg)
	d		D ₂	P	J	A ₂	N	L	H ₁	A ₁	D ₁	S	B	Z	
	(in)	(mm)													
UCFCSX05 05-13 05-14 05-15 05-16	13/16 7/8 15/16 1	25	111	92.08	65.11	9.9	12	6.1	9.4	23.9	76.2	15.9	38.1	32.1	1.34
UCFCSX06 06-17 06-18 06-19 06-20	1-1/16 1-1/8 1-3/16 1-1/4	30	127	104.78	74.09	7.9	12	9.4	9.4	22.6	85.725	17.5	42.9	33.3	2.06
UCFCSX07 07-21 07-22 07-23	1-5/16 1-3/8 1-7/16	35	133.1	111.1	78.56	8.9	12	10.9	10.9	25.9	92.075	19	49.2	39.1	2.21
UCFCSX08 08-24 08-25	1-1/2 1-9/16	40	155.5	130.18	92.05	7.9	14	10.9	10.9	25.4	107.95	19	49.2	38.1	3.03
UCFCSX09 09-26 09-27 09-28	1-5/8 1-11/16 1-3/4	45	155.5	130.18	92.05	7.9	14	11.9	10.9	24.9	107.95	19	51.6	40.5	2.98
UCFCX10 10-30 10-31 10-32	1-7/8 1-15/16 2	50	162	136.5	96.52	7.1	14	16	10.9	25.9	114.3	22.2	55.6	40.5	3.57
UCFCSX11 11-33 11-34 11-35 11-36	2-1/16 2-1/8 2-3/16 2-1/4	55	180.8	152.4	107.76	4	14	22.1	13	25.9	127	25.4	65.1	43.7	5
UCFCSX12 12-38 12-39	2-3/8 2-7/16	60	193.8	165.1	116.74	10.9	14	20	14	33	139.7	25.4	65.1	50.6	6.32
UCFCSX13 13-40 13-41	2-1/2 2-9/16	65	193.7	165.1	116.74	10.9	14	20	14	33.3	139.7	30.2	74.6	55.3	8.25
UCFCSX14 14-42 14-43 14-44	2-5/8 2-11/16 2-3/4	70	222.2	190.5	134.7	14	17.5	20	16	36	161.925	33.3	77.8	58.5	8.6
UCFCSX15 15-45 15-46 15-47 15-48	2-13/16 2-7/8 2-15/16 3	75	222.2	190.5	134.7	11.9	17.5	22.1	16	35	161.925	33.3	82.6	61.2	8.76
UCFCSX17 17-53 17-55	3-5/16 3-7/16	85	260	218.95	154.82	9.9	20.6	24.9	19	36	187.325	39.7	96	66.2	13.41
UCFCSX20 20-63 20-64	3 4	100	276	238	168.29	22	23	28	22	66	206.375	79.2	117.5	90.3	18.5