


RSA200/RSB200 Rubber mounted cartridge units, Eccentric/Setscrew locking

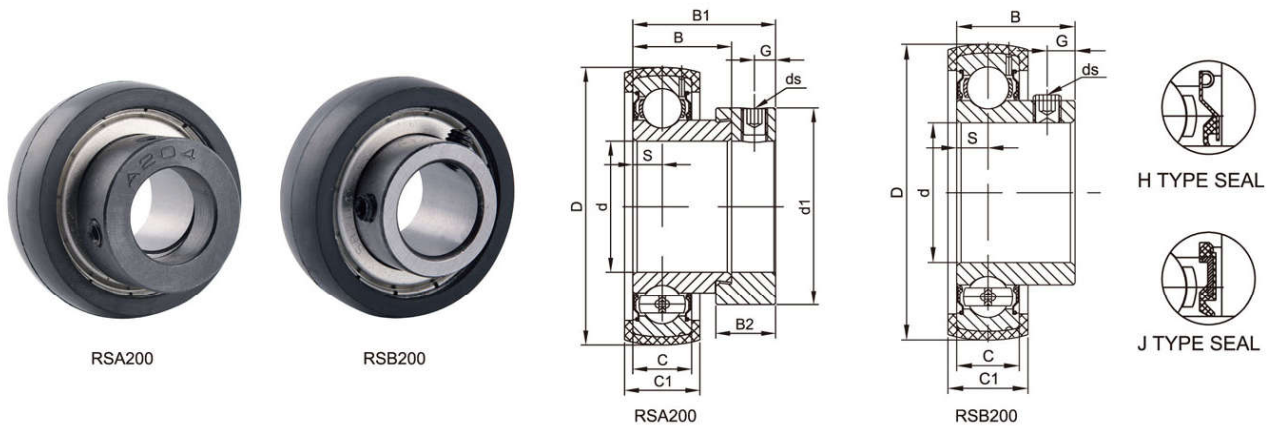

RSA200 Series

Bearing No.	Shaft Dia		Dimensions(mm)											Weight (kg)
	d		D	B	C	C ₁	S	B ₁	B ₂	d ₁	G	ds		
	(in)	(mm)										(mm)	(in.UNF)	
RSA 201 201-8	1/2	12	47	19.1	12	15	6	28.6	13.5	28.6	5	M6x1	1/4-28	0.2
RSA 202 202-9 202-10	9/16 5/8	15	47	19.1	12	15	6	28.6	13.5	28.6	5	M6x1	1/4-28	0.2
RSA 203 203-11	11/16	17	47	19.1	12	15	6	28.6	13.5	28.6	5	M6x1	1/4-28	0.2
RSA 204 204-12	3/4	20	52	21.5	14	17	7	31	13.5	33.3	5	M6x1	1/4-28	0.21
RSA 205 205-14 205-15 205-16	7/8 15/16 1	25	62	22	15	18	7.5	31.5	13.5	38.1	5	M6x1	1/4-28	0.25
RSA 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	72	23.8	16	20	8	35.7	15.9	44.5	6	M6x1	1/4-28	0.39

RSB200 Series

Bearing No.	Shaft Dia		Dimensions(mm)						ds		Weight (kg)
	d		D	B	C	C1	S	G	(mm)	(in.UNF)	
	(in)	(mm)									
RSB 201 201-8	1/2	12	47	22	12	15	6.0	4.9	M5x0.8	10-32	0.09
RSB 202 202-9 202-10	9/16 5/8	15	47	22	12	15	6.0	4.9	M5x0.8	10-32	0.08
RSB 203 203-11	11/16	17	47	22	12	15	6.0	4.9	M5x0.8	10-32	0.07
RSB 204 204-12	3/4	20	52	25	14	17	7.0	5.0	M6x1	1/4-28	0.12
RSB 205 205-13 205-14 205-15 205-16	13/16 7/8 15/16 1	25	62	27	15	18	7.5	5.5	M6x1	1/4-28	0.18
RSB 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	72	30	16	20	8.0	5.9	M6x1	1/4-28	0.26