


Flange Cartridge Units **LDK**[®]

UCFCS Standard duty,Wider inner ring bearing,Inch-based housing,Setscrew locking

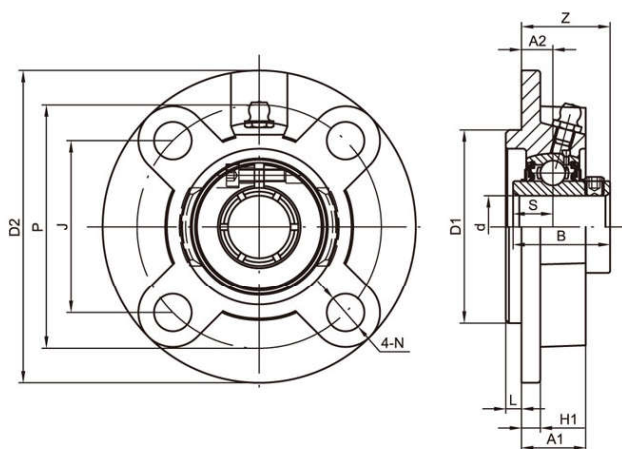

Unit No.	Shaft Dia		Dimensions (mm)												Weight (kg)
	d		D2	P	J	A2	N	L	H1	A1	D1	S	B	Z	
	(in)	(mm)													
UCFCS206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	111	92.08	65.11	9.9	12	6.1	9.4	23.9	76.2	15.9	38.1	32.1	1.26
UCFCS207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	127	104.78	74.09	7.9	12	9.4	9.4	22.6	85.725	17.5	42.9	33.3	1.84
UCFCS208 208-24 208-25	1-1/2 1-9/16	40	133.1	111.1	78.56	8.9	12	10.9	10.9	25.9	92.075	19	49.2	39.1	2.02
UCFCS209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	155.5	130.18	92.05	7.9	14	10.9	10.9	25.4	107.95	19	49.2	38.1	2.78
UCFCS210 210-30 210-31 210-32	1-7/8 1-15/16 2	50	155.5	130.18	92.05	7.9	14	11.9	10.9	24.9	107.95	19	51.6	40.5	2.76
UCFCS211 211-32 211-34 211-35	2 2-1/8 2-3/16	55	162	136.5	96.52	7.1	14	16.0	10.9	25.9	114.3	22.2	55.6	40.5	3.29
UCFCS212 212-36 212-37 212-38 212-39	2-1/4 2-5/16 2-3/8 2-7/16	60	180.8	152.4	107.76	4	14	22.1	13	25.9	127	25.4	65.1	43.7	4.61
UCFCS213 213-39 213-40	2-7/16 2-1/2	65	193.8	165.1	116.74	10.9	14	20.0	14	33	139.7	25.4	65.1	50.6	5.91
UCFCS214 214-43 214-44	2-11/16 2-3/4	70	193.7	165.1	116.74	10.9	14	20.0	14	33.3	139.7	30.2	74.6	55.3	7.98
UCFCS215 215-47 215-48	2-15/16 3	75	222.2	190.5	134.7	14	17.5	20.0	16	36	161.925	33.3	77.8	58.5	8.34