


SK..E & SK..ES

Body: weldable steel, with dowel pin on shanks,

SK..E: Mounted GE..E type of radial spherical plain bearings.

SK..ES: Mounted with GE..ES type of radial spherical plain bearings.

Sliding contact surfaces: Steel/Steel

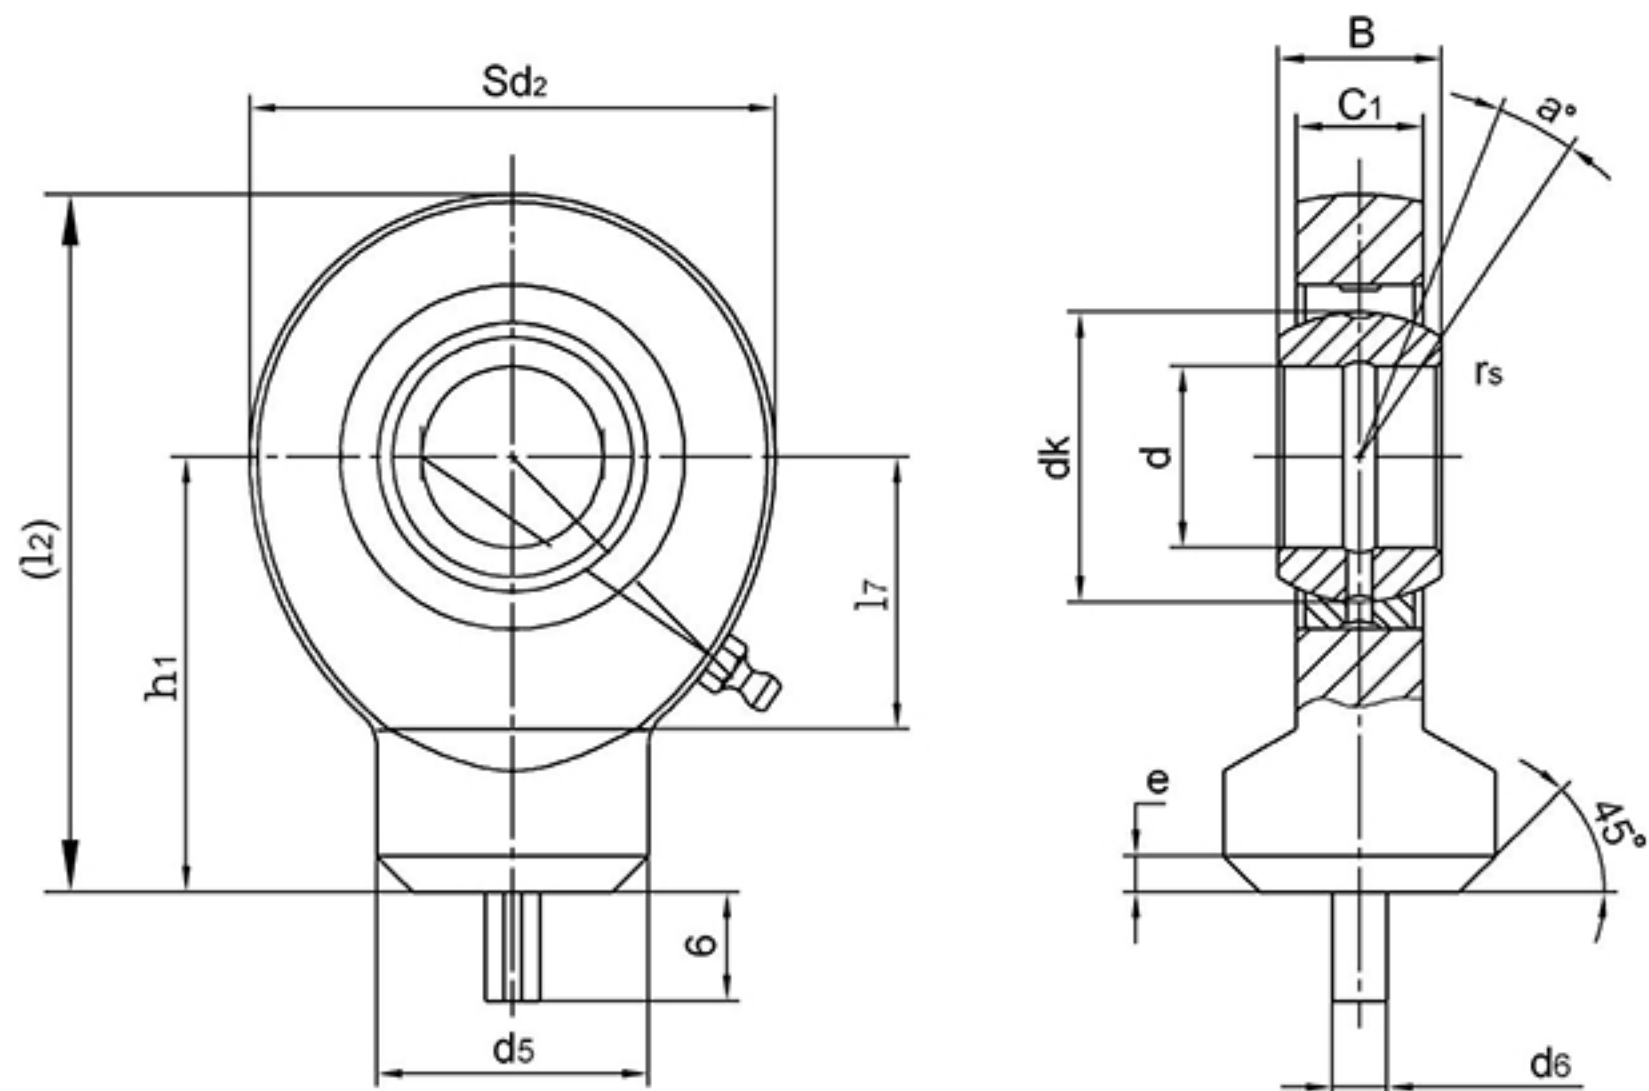

Bearing No.	Dimensions(mm)											a° mis. angle	Load ratings (KN)		Weight ≈ kg
	d	B	dk	C1	d2	d5	d6	h1	e	l7	(l2)		Dynamic	Static	
SK10E ¹⁾	10	9	16	7	29	15	3	24	2	15	38.5	12	8.1	15	0.041
SK12E ¹⁾	12	10	18	8	34	17.5	3	27	2	18	44	10	10	21	0.066
SK15ES ²⁾	15	12	22	10	40	21	4	31	2.5	20	51	8	16	32	0.12
SK17ES ²⁾	17	14	25	11	46	24	4	35	2.5	23	58	10	21	40	0.19
SK20ES	20	16	29	13	53	27.5	4	38	2.5	27	64.5	9	30	54	0.26
SK25ES	25	20	35.5	17	64	33.5	4	45	3	32	77	7	48	72	0.45
SK30ES	30	22	40.7	19	73	40	4	51	3	37	87.5	6	62	95	0.67
SK35ES	35	25	47	21	82	47	4	61	3	42	102	6	79	125	1.02
SK40ES	40	28	53	23	92	52	4	69	4	48	115	7	99	156	1.04
SK45ES	45	32	60	27	102	58	6	77	5	52	128	7	127	208	1.93
SK50ES	50	35	66	30	112	62	6	88	5	60	144	6	156	250	2.68
SK60ES	60	44	80	38	135	70	6	100	5	75	167.5	6	245	390	4.6
SK70ES	70	49	92	42	160	80	6	115	6	87	195	6	313	510	7.0
SK80ES	80	55	105	47	180	95	6	141	6	100	231	6	400	620	11.0

Can not be relubricated.

Can only be relubricated through the rod end housing.