


LDK[®] Thermoplastic Housed Units

TP-SUEP Thermoplastic pillow blocks, Solid base housing, Stainless steel inserts,
With food grade grease and silicon rubber seal, Concentric locking

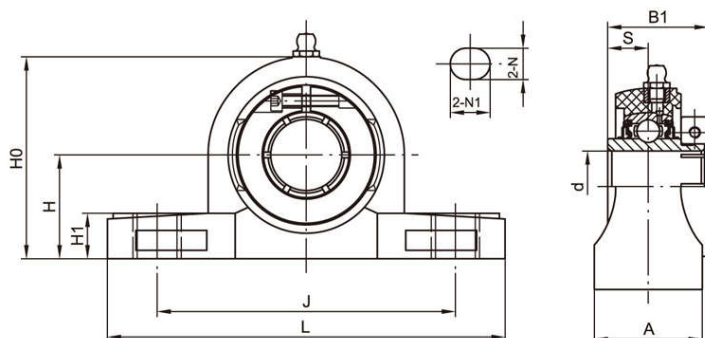

Unit No.	Shaft Dia		Dimensions(mm)										Bolt Size (mm)	Weight (kg)
	d		H	L	J	A	N	N ₁	H ₁	H ₀	B ₁	S		
	(in)	(mm)												
TP-SUEP204 204-12	3/4	20	33.3	127	95	38	11	14	15	65.5	33	12.7	M10	0.31
TP-SUEP205 205-14 205-15 205-16	7/8 15/16 1	25	36.5	140	105	38	11	14	16	71	35.4	14.3	M10	0.35
TP-SUEP206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	42.9	163	119	46	14	18	18	84	39.8	15.9	M12	0.56
TP-SUEP207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	47.6	168	127	48	14	18	18	94.5	43.9	17.5	M12	0.8
TP-SUEP208 208-24 208-25	1-1/2 1-9/16	40	49.2	184	137	54	14	18	19.5	99	50.2	19	M12	1.02
TP-SUEP209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	54	192	146	54	17	20	23	106	50.2	19	M16	1.16
TP-SUEP210 210-30 210-31 210-32	1-7/8 1-15/16 2	50	57.2	206	159	60	17	20	24	114	52.6	19	M16	1.31
TP-SUEP211 211-32 211-34 211-35	2 2-1/8 2-3/16	55	63.5	217	172	60	17	20	22	124	56.6	22.2	M16	1.69
TP-SUEP212 212-36 212-38 212-39	2-1/4 2-3/8 2-7/16	60	69.9	238	186	66	18	24	24	137	66.6	25.4	M16	2.31

MODE OF LOAD	BREAKING POINT OF HOUSINGS(N)								
	204	205	206	207	208	209	210	211	212
	8800	13700	12650	12750	13100	13360	13850	14450	20130
	7700	10000	10600	12750	11100	11400	11750	12450	13110
	5000	5100	5750	7500	8500	8950	9550	10150	10700

Notes: Anti-Bacteria Protection Series is available by adding prefix "AB" as designation. Ordering example: ABTP-SUEP204