


LDK[®] Thermoplastic Housed Units

TP-SUEFL Thermoplastic flange 2-bolt,Solid base housing,Stainless steel inserts,
With food grade grease and silicon rubber seal,Concentric locking

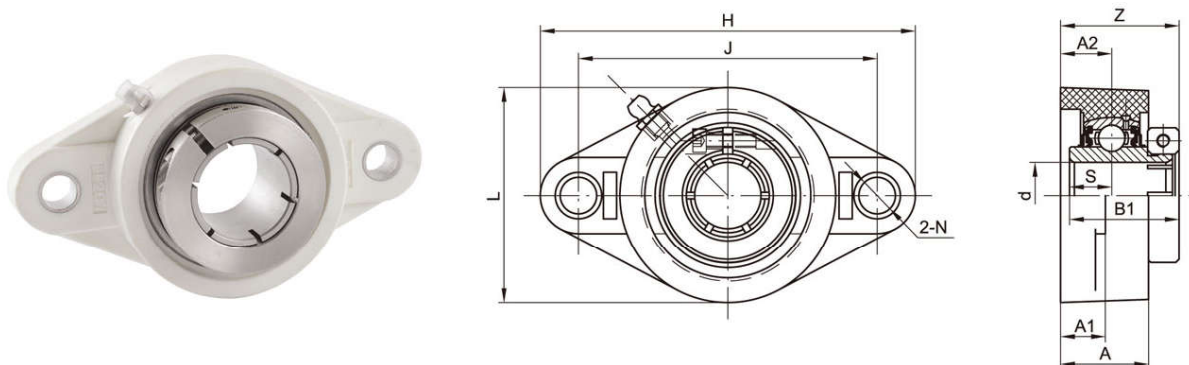

Unit No.	Shaft Dia		Dimensions(mm)										Bolt Size (mm)	Weight (kg)
	d		H	J	A ₂	A ₁	A	N	L	B ₁	S	Z		
	(in)	(mm)												
TP-SUEFL204 204-12	3/4	20	113	90	15.4	14	26.5	11	65	33	12.7	35.7	M10	0.26
TP-SUEFL205 205-14 205-15 205-16	7/8 15/16 1	25	131	99	17	14	29	11	69	35.4	14.3	38.0	M10	0.32
TP-SUEFL206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	148	117	19	14	31	11	80	39.8	15.9	42.9	M10	0.47
TP-SUEFL207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	166	130	18	16	32	13	92	43.9	17.5	44.4	M12	0.73
TP-SUEFL208 208-24 208-25	1-1/2 1-9/16	40	176	144	21.5	20	37.5	14	101	50.2	19	52.7	M12	0.94
TP-SUEFL209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	189	148.5	24	21	41	17	108	50.2	19	55.2	M16	1.11
TP-SUEFL210 210-30 210-31 210-32	1-7/8 1-15/16 2	50	197	157	25	21	43	17	116	52.6	19	58.6	M16	1.22
TP-SUEFL211 211-32 211-34 211-35	2 2-1/8 2-3/16	55	224	184	25	20	43	17	130	56.6	22.2	59.4	M16	1.61
TP-SUEFL212 212-36 212-38 212-39	2-1/4 2-3/8 2-7/16	60	250	202	29	20	48	18	140	66.6	25.4	70.2	M16	2.28

MODE OF LOAD	BREAKING POINT OF HOUSINGS(N)								
	204	205	206	207	208	209	210	211	212
	10872	12554	18224	16900	17213	17600	17950	18300	18700
	10590	15093	16826	14900	15150	15350	15650	15900	16250
	5150	5310	5630	6000	6510	6940	7590	8250	8950

Notes:Anti-Bacteria Protection Series is available by adding prefix"AB" as designation.Ordering example:ABTP-SUEFL204